


Hydraroll Quick-Fit Pallet Loading Systems for Vans

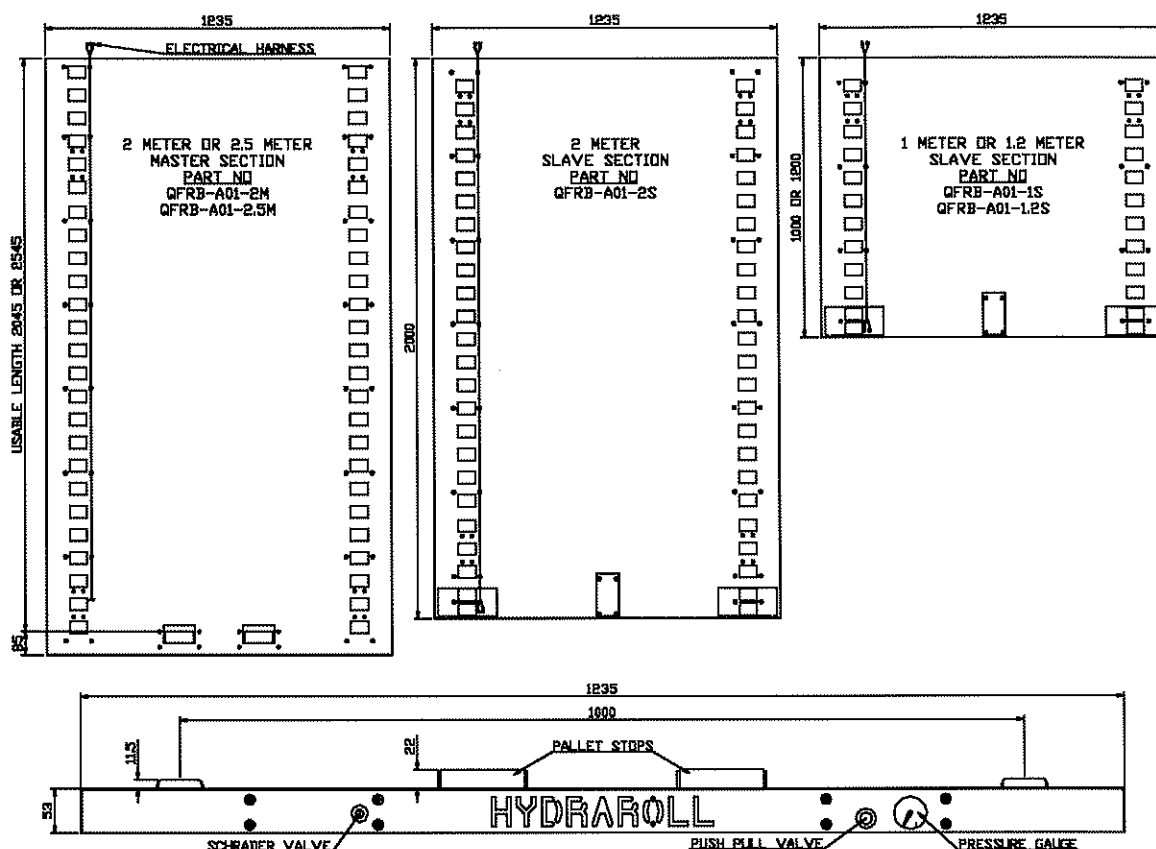

Specifications

Track Gauge	1000mm
Roller Pitch	70mm
3 Pallet System QFRB3 1x Master + 1x Small	= 149kgs
4 Pallet System QFRB4 1x Master + 1x Slave	= 195kgs

Rise & Fall Track Type

Hydraroll Type Mk 9 Roller	38mm dia x 50mm long
Lift	11.5mm

Air Supply & Electrics

- Self contained air supply via reservoirs charged via 12 volt compressor.
- Electric supply via cigarette lighter/charger
- Working pressure 30psi / 2.1bar
- 3 lift capability once charged with air
- Auto recharge while driving
- Emergency recharge via Schrader valve and airline
- Power supply 12v 15amps (fused)

Safety Facilities

- Rise and fall rollerbed. In transit rollers dead below floor level.
- Quick exhaust valve (QEV) fitted to ensure no over charging of reservoir.
- Air operating valve deactivated via door closure in case of operator error.
- Rear Spring loaded pallet stops.

Acceptable Pallets

Chep Style	1200 x 1000mm
Euro Style	1200 x 800mm
1/2 Euro Style	1200 x 400mm
Pallet Board	1200 x 1000mm
to hold all stillages, post pallet or loose loads	
Capacity	Maximum of 600kg per m

Joloda
Hydraroll
Loading Technology

Joloda (International) Ltd

51 Speke Road, Garston, Liverpool, England L19 2NY

Telephone: +44(0)151 427 8954

Fax: +44(0)151 427 1393

E-mail: info@joloda.com

Website: www.joloda.com